


For best results, locate a suitable site for your fountain that is leveled and provides pleasing viewing angles.
 Note: Always follow local electrical codes and use a 110V GFCI protected outlet.

5125F9

1. Locate a suitable site for your Fluted In Valencia Fountain, 9 pc. Site should be level and provide a pleasing viewing angle.
2. Locate the #6504 Pool in the center of your site. Bowl must be level.
3. Place P15 Pump next to Standpipe. Slip pump cord through standpipe and pull cord out from bottom of pool. Seal cord with RS1.5 rubber stopper and corks. Corks will be removed if order AB8740 lights.
4. Connect ADAPTER 1" MNPT X 1" BARB to pump. Connect NKT1" Tubing X 36" to adapter on pump. CLAMP LARGE SS to secure tubing.
5. As you set 7127 Pedestal in center of Pool feed Tubing through 7127 Pedestal. Measure between other side of base and the pool wall to make sure the base is centered.
6. Place 6128 Bowl on its side on protective sheet (burlap, excelsior, towel or folded corrugate carton) and attach two Adapters 1" MNPT X 1" Barb one on top and the bottom.
7. As you place 6128 Bowl on top of 7127 connect tubing to the bottom of 6128 Bowl Adapter and secure with CLAMP LARGE SS. Level 6128 with shims if necessary.
8. Connect NKT1" Tubing X 16" to adapter on top of 6128 Bowl. Secure with CLAMP #80
9. Connect TEE 1" To end of NKT1" tubing X 16". The other ends of TEE 1" connect (2) NKT1" Tubing X 4". Secure all Tubing with CLAMP #80. Slip R2 restrictor over NKT1" Tubing (SEE ILLUSTRATION)
10. Place 6127 Pedestal/Bowl on its side on protective sheet, (burlap, excelsior, towel or folded corrugate carton) add ADAPTER 3/4" MNPT X 1" BARB on bottom and the ADAPTER 3/4" MNPT 1" BARB top as shown.
11. As you place 6127 Pedestal/Bowl on top of 6128 connect tubing from the TEE 1" to bottom adapter of 6127 Pedestal/Bowl as shown. Level 6127 if necessary.
12. Connect ADAPTER 3/4" X 1" BARB to 5125 Finial. Connect NKT1" Tubing X 4" to Adapter from 5125 Finial.
13. As you place 5125 Finial on top of 6127 Pedestal/Bowl align Tubing to Adapter from 6127 Pedestal/Bowl and push down. Place NIPPLE 3/4" CLOSE to top of 5125 Finial.
14. Fill all basins and pool with water. Plug pump into 110V GFCI protected outlet.
15. Adjust R2 as necessary to control water flow.
16. Finally, place the four 9024 Surround Sections around the fiberglass pool and align evenly.

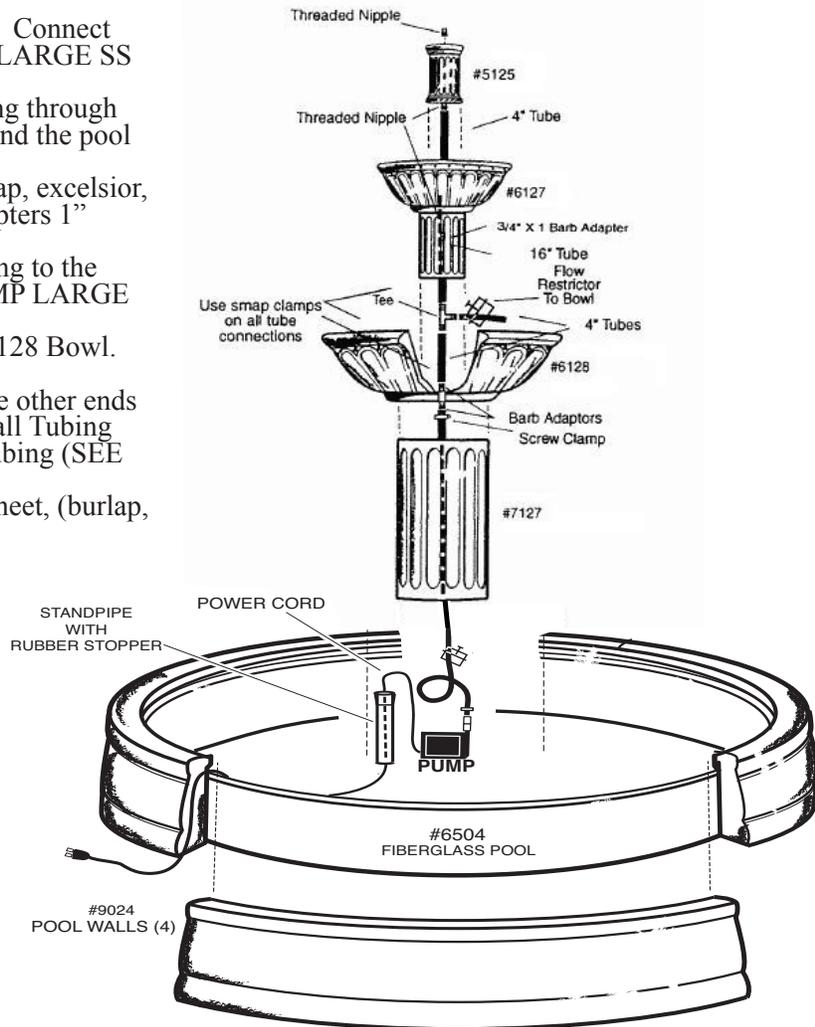

IMPORTANT - WINTER CARE:

Do not allow water to collect and freeze in fountain bowl(s) or shell(s). Do not allow fountain pieces to sit in a pool of ice. Disassemble entire fountain and pump and store indoors during the winter season.

If you cannot store your fountain indoors during the winter season, you must at least protect it from ice collection or exposure: first, remove the statue(s) and pump, storing them inside if possible. Next, locate the drain plug on the underside of bowl(s) or shell(s). Remove the drain plug to drain any water "trapped" between the walls of the bowl(s) or shell(s). Then fill the bowl(s) or shell(s) with an absorbent material, such as burlap, blankets, etc. Finally, cover the entire fountain with a Henri Fountain Cover. Should condensation droplets form on the inside of the cover, the material will absorb them.

By following these simple and sensible precautions during the winter season, you will protect your fountain for years of beauty and enjoyment!

CAUTION: The use of Chlorine or Chlorine Bleach may damage the finish of your fountain. When cleaning your fountain, it is best to test the cleaning agent on an underside or back surface to determine the agent's suitability. We recommend the use of a mild, non-abrasive treatment, such as Henri Lime Remover and Preventer. To avoid foaming, thoroughly rinse the fountain to remove the entire cleaning agent.